

ProCapture-WP

Water-Proof Fingerprint Access Control Terminal








ProCapture-WP is an access control terminal applying the most advanced BiOD fingerprint sensor. Its outstanding performance provides a high identification rate towards dry, wet and rough fingers .

The fingerprint verification speed has been dramatically increased by its optimized fingerprint algorithm and the brand new ZMM220 hardware platform, equipped with a fast 1.2GHz processor.

The touch keypad delivers a smooth and easy user operation to enroll and delete users, set device and access control parameters, etc.

With its IP65 rated waterproof and dustproof structure, ProCapture-WP offers extra durability in harsh conditions such as outdoor environments. It is specially designed for standalone applications such as house, office, shop, garage, factory and others.

Features


-  Modern Design & Interactive UI
-  Revolutionary BioID Fingerprint Sensor
-  Multiple Verification Modes: Fingerprint / Card / Password
-  Outstanding Performance With Dry, Wet and Rough Fingers
-  Waterproof IP65 Rate



Specifications (G): GL Exclusive Feature

<p>Capacity</p> <p>Fingerprint 20,000 Card 10,000 Transaction 100,000</p> <p>Communication</p> <ul style="list-style-type: none"> (G) TCP/IP (G) RS485 (For Slave Reader) <p>Wiegand Input / Output Security Relay Box</p> <p>Access Control Interface</p> <p>Lock Relay Output Alarm Output / Auxiliary Input Exit Button / Door Sensor Doorbell Output</p> <p>(G) Dust Proof and Waterproof Rating: IP65</p>	<p>Hardware</p> <ul style="list-style-type: none"> (G) 1.2GHz High Speed CPU (G) Memory 128MB RAM / 256MB Flash <p>BioID Fingerprint Sensor 2.4 Inches TFT-LCD Screen 125KHz EM Reader / IC Card (Optional) Hi-Fi Voice & Indicator Anti-dismantle Alarm</p> <p>(G) Touch Keypad</p> <p>Standard Functions</p> <p>Access Levels / Groups / Holidays DST / Bell Schedule Duess Mode Anti-Passback Record Query Custom Wallpaper & Screen Saver</p>	<p>Special Functions</p> <ul style="list-style-type: none"> (G) Multiple Verification Modes ZK Encrypted Card (Optional) (G) Fingerprint Card (Optional) <p>Compatibility</p> <p>Wiegand Slave Reader (G) RS485 FP Slave Reader ZKBioSecurity Software</p> <p>Additional Info</p> <p>Working Temperature: -10 °C ~ 50 °C Dimensions: 202.30x96.80x35.00mm. Fingerprint Algorithm ZKFinger v1.0.0 Fingerprint: FAR≤0.0001% FRR≤0.01% Package Includes 12V 3A Power Supply</p> <p>Power</p> <p>Operating Voltage 12V DC Current Draw < 500mA</p>
--	--	---

Configuration

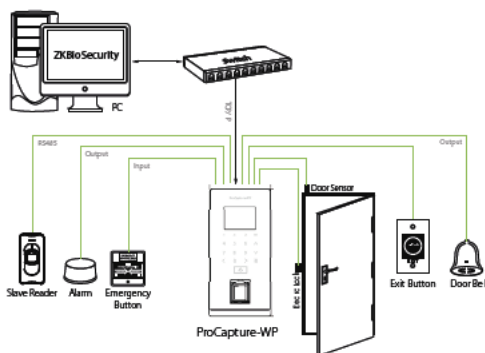

Dimensions (mm)

