

ZK-DM-U0H3-HT4C64

4K Ultra-HD Network Video Decoder



- 4 ch@4K / 9 ch@3MP / 16ch@1080P decoding ability
- Supports H.265/ H.264 video stream formats, 1U Casing
- 5 x HDMI output: 1 x HDMI Sync Output + 4 x HDMI Split Output
- Support 1/4/9/16/36/64 display split
- Support 2*2 Screen Spanning Mode
- Support remote playback decoding
- Support Two-way Audio
- Support Onvif streaming
- Support CMS/VMS remote control

Technical Specification

System

Operating system	Linux
Picture display	1/4/9/16/36/64
Operating applications	WEB client, VMS/CMS


Performance

Video decoding	H.265/H.264/MJPEG
Decoding capacity	4ch 4K@30fps/9ch 3MP@30fps/16ch 1080P@30fps 36ch 720P@30fps/64ch 960H@30fps
Display resolution	4K/1080P/720P/D1
Video frame rate	PAL: 1-25fps; NTSC: 1-30fps
Bitsream type	Compound Stream/Video Stream
HDMI	5
Video Output	1 * HDMI sync output
Video Split Output	4 * HDMI split output
Audio Input and Output	1 in/ 1 out, RCA
Display Resolution	3840*2160/1920*1080/1024*768/1280*960 (adjustable)
Splicing control function	Support 2*2 Screen Splicing control
Network Interface	1 RJ-45 port(10/100/1000Mbps)

General

Working temperature and Humidity	-10°C ~ 55°C/10%-90%
Power Supply	DC12V/4A
Power Consumption	≤10W
Dimension	360(L)x242.4(W)x48(H)mm
Weight	2KG

Dimension

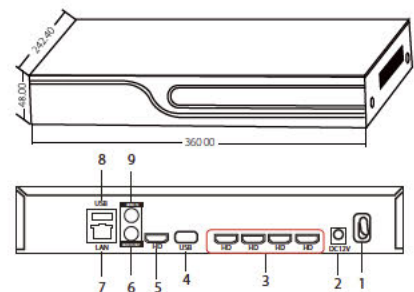

1	Power switch	6	Audio Out
2	DC 12V	7	RJ45 port
3	4 HDMI 2.0 Video output splicing port	8	USB2.0
4	USB 3.0	9	Audio input
5	Main HDMI Video output		

