

BL-852Q28L | P series

2MP Motorized Face Recognition Network Bullet Camera



- 1/2.8" 2MP Sensor
- H.265 Triple-stream Encoding
- Embedded Face Recognition Algorithm
- 3,000 Face Templates
- 30m IR Distance
- Support SMB Deployment and White/Black List Access Control
- Multiple Web Browser Supported, IE/Safari/Chrome/Firefox
- P2P Cloud Function By Mobile App (AntarView Pro)



System Overview

The ZKTeco 2MP Starlight Face Recognition Camera offers Artificial Intelligence at the edge – performing complex real-time facial recognition and facial feature comparison without the need for an external database. The camera perfectly provides accurate recognition result and further white/black list application. Meanwhile benefit by outstanding Sony STARVIS sensor and ISP optimization, it's capable of balancing light throughout the scene and promising crystal clear images in dark environment. Cloud function is built-in for every device, which is more convenient and flexible for real-time and remote viewing from APP and VMS.

Functions

H.265+

Delivering high quality video with up to 70% bandwidth saving. H.265+ is the evolutionary optimization of H.265 and traditional H.264. The Smart H.265+ includes a series of scene-adaptive encoding strategies such as Dynamic ROI, flexible multi-frame reference structure and smart 2D&3D noise reduction.

IVA (Intelligent Video Analysis)

IVA is a built-in video analytic algorithm that detects object behaviors in a specific area, such as Tripwire violations, intrusion detection, abandoned or missing objects, and the number of targets enter and exit. A camera with IVA will deliver quickly and accurately responds to monitoring events that makes surveillance more intelligent and efficient.

Technical Parameters

Camera

Model	BL-852Q28L	Effective Pixels	1920(H)* 1080(V)
Image Sensor	1/2.8" 2MP STARVIS CMOS	Flash/DDR	1GB/4GB
Electronic Shutter Speed	Auto/Manual, 1/5~1/100000s	S/N Ratio	More than 52dB
Min. Illumination	0.01Lux@F1.6 (color) 0.001Lux@F1.6(B/W) 0 Lux with IR on	IR Distance	30m
		IR LED No.	2

Lens

Lens Type	Motorized	Aperture	F1.6
Mount Type	Board-in	Angle of View	41°~106°
Focal Length	3.35mm-10.5mm	Optical Zoom	4X

Video

Compression	H.265+/H.265/H.264	WDR	120dB
Resolution	1080P(1920*1080)/1.3MP(1280*960)/720P(1280*720) Q720P(640*360)/CIF(352*288)	Day/Night	Auto(ICR)/Color/B/W
Bit Rate Control	CBR/VBR	White Balance	Supported
Bit Rate	1Kbps-8Mbps	Defog	Supported
Streaming	3 streams	Noise Reduction	3D DNR
Frame Rate	Main stream: 1920*1080(1~20fps) Sub stream: 704*576(1~25/30fps) Thrid Stream: 1280*720(1-25/30fps)	Mirror	Off / On, 0°/90°/180°/270°
Digital Zoom	12x	Flip	Supported
Audio Compression	G.711u	BLC	Supported
		ROI	Support 4 fixed region for main stream and sub stream separately
		Anti-flicker	Supported
		Privacy Mask	5 Areas

IVA Alarm

Video Detection	Motion Detection, Video Tampering	IVA	Tripwire/Intrusion/Object Left/Missing/Target Counting /Sound Detection/Fire Detection/Scene Change/VQD
-----------------	-----------------------------------	-----	---

Face Recognition

Face Templates Storage Capacity	3,000 images	Face Quality Filtering	Supported
Face Detection QTY	Detection of 30 face targets at the same time	Detect Area	Support specied area, default is full screen
Detected Face Size	Face pixel $\geq 60*60$	Privacy Mask	4 areas
Capture Response	≤ 300 ms	Trigger Mode	Video Trigger

Network

Protocols	TCP/IP, UDP, HTTP, DHCP, RTSP, DDNS, NTP, PPPoE, UPnP, SMTP	Web Browsers	IE/Firefox/Chrome/Safari
Onvif	Onvif Profile S	VMS	AntarVis 2.0
Max. Online Users	5	Mobile App	AntarView Pro
		Platform	Mac OS/ Windows/iOS/Android

I/O port

Ethernet	1 RJ-45 port (10/100Mbps)	Reset Button	Supported
Audio I/O	1 in/ Audio out optional	TF Slot	N/A
Alarm I/O	N/A	USA	N/A
RS485	N/A		


General

Power Supply	PoE, IEEE802.3af	Working Humidity	0%-90%
	DC12V±10%	Dimensions	186.5 (L)*71.7 (W)*84 (H)mm
Power Consumption	< 3W	Net Weight	0.50KG
Protection	IP67	Gross Weight	0.64KG
Working Temperature	-30°C ~ 60°C		

Ordering Information

Type	Part Number	Description
Face Recognition Camera	BL-852Q28L	2MP, 3.35~10.5mm Motorized Face Recognition Network Dome Camera

Dimensions (mm)

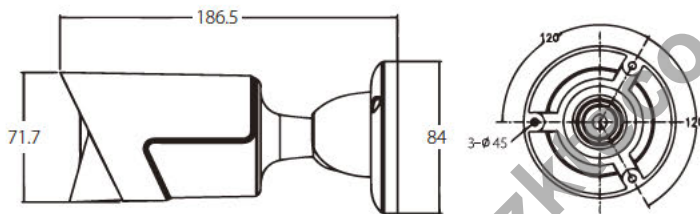

www.zkteco.com/technology

