

PE04-60

4 Ports 10/100Mbps PoE Switch



- Layer 2 Commercial Switch, mini Metal Enclosure
- Long-distance PoE Transmits Power and Data 250 meters
- Max PoE power output 30W for each port
- Conforms to IEEE 802.3i, IEEE 802.3u and IEEE 802.3X
- Conforms to IEEE 802.3af and IEEE 803.3at
- MDI/MDIX Self-adaptation
- Lightning Protection for LAN Port and Power

System Overview

PE04-60 provides a simple network for IP cameras installation which could run data and power transmission through CAT 5E/6 cables at the same time. It also supports long transmission distance at 250 meters to save cost for the project to replace extender, fiber and coaxial cable etc.


Technical Specification

Model Number	PE04-60	Mac Table Size	1K
Ethernet Port	4 PoE Ports (10/100 Mbps) 2 Uplink Ports (10/100 Mbps) All ports support MDI/MDIX self- adaptation	MTBF	100,000 hours
POE Standards	IEEE 802.3af, IEEE802.3at	Power Input	AC220V, 50/60Hz
PoE Consumption	Max 30W per Port, total PoE budget 60W	Lightning Protection	2KV
Network Protocol	IEEE 802.3i 10BASET IEEE 802.3u 100BASETX IEEE 802.3x Flow Control	Working Temperature	-20°~50°C
Switching Bandwidth	1.6Gbps	Working Humidity	10% ~ 90%, non-condensing
Packet Forwarding Rate	0.982Mpps	Dimesions	142 * 113 * 40mm
Buffer Memory	1Mb	Weight	1KG
		Certifications	CE/LVD EN60950 FCC Part 15 Class B VCCI Class B EN 55022 (CISPR 22), Class B

Ordering Information

Product Type	Part Number	Description
PoE Switch	PE04-60	4 Ports 10/100Mbps PoE Switch

Dimensions (mm)

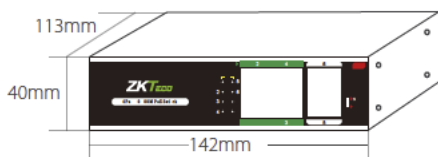

- A. Working LED Indicator
- B. 4*PoE Ports
- C. 2*10/100Mbps Uplink RJ45 Ports
- D. Working Mode Switch
- E. Power Input Port



Application

