

Z8404XE-S | H.265 Z8000 DVR series

4-Channel Penta-brid 1080P Lite Digital Video Recorder



Features

- H.265/H.264 Decoding
- Support AHD/TVI/CVI/CVBS/IP Video Input
- Support HDMI up to 1080p output
- Support 4CH 1080P Lite Resolution Preview and Playback
- Mobile phone remote monitoring (iOS, Android)



System Overview

ZKTeco Z8400XE/F-S/SL series DVR could deliver up to 1080P Lite resolution excellent image over advanced H.265+ compression. It's the ideal consideration for the balance of quality, performance and budget.

The friendly GUI provides intuitive shortcut operations, remote control and management, exible storage, smart search and playback. It's widely used for the government, banking sectors, manufacturers, educational or commercial projects.

Powered by the strong interoperability and Onvif Pro le S, it's compatible with a variety of 3rd party crossing platform VMS.

Functions

Smart H.265+

Delivering high quality video with up to 70% bandwidth saving. H.265+ is the evolutionary optimization of H.265 and traditional H.264. The Smart H.265+ includes a series of scene-adaptive encoding strategies such as Dynamic ROI, flexible multi-frame reference structure and smart 2D&3D noise reduction.

5 in 1 Video Input

Penta-brid access technology seamlessly records video from AHD, TVI, CVI, CVBS, and IP sources simultaneously, provide a easy integration into existing video surveillance systems while leveraging existing networks, cabling, and cameras.

Intelligent Video Analysis (IVA)

It allows detection on multiple object behaviors, such as Tripwire, Intrusion, Objects Detection, Target Counting etc, and quickly and accurately responds to monitoring events in a specific area.

Technical Parameters

Model	Z8404XE-S
-------	-----------

System

Processor	Multi-core Embedded Processor
Operation System	Embedded Linux

Video/Audio

Video Input	4ch BNC interface (1.0Vp-p, 75 Ω)
Audio	1 Channel Input, 1 Channel Output, RCA
AHD Input	1080P, 720P
TVI Input	1080P, 720P
CVI Input	1080P, 720P
IP Camera Input	Up to 8ch 2MP
Hybrid Mode	2ch(AHD/TVI/CVI/CVBS)+2ch(IP)

Recording

Video Compression	H.265/H.265+/H.264
Recording Resolution	1080P lite/720P
Frame Rate	4CH 1080P lite@25fps, 720P@25fps
Incoming Bandwidth	32Mbps
Bitrate	Main Stream: 11Kbps-2048Kbps Sub Stream: 50Kbps~700Kbps
Audio Compression	G.711a
Audio Bite Rate	64Kbps
Record Mode	Manual/External Alarm/ Motion/Scheduled/IVA Alarm

Playback and Backup

Playback Channel	1/4
Search Mode	IVA Search/Time/Motion Detection
Playback Function	Play, Stop, Play Forward, Play Backward, 30 Seconds Forward, 30 Seconds Backward, Fast Play, Slow Play, Single Frame Play, Hide/Show Time Bar, Backup, Snapshot, Full Screen
Backup Mode	USB Device/Network

IVA Alarm

Local IVA Functions	Target Counting, Object Abandon/Missing, Intrusion, Tripwire, Human Detection
Regular Detection	Motion Detection/Video Tampering/Video Loss

Network

Network Protocol	TCP/IP, HTTP, DDNS, SMTP(SSL), DHCP, PPPoE, UPnP, NTP, P2P, ONVIF
Max. Online User	5
Mobile App	AntarView Pro
Interoperability	Onvif Profile S, SDK

I/O Port and Storage

Network Interface	1 RJ-45 port(10/100Mbps)
USB	2*USB 2.0
HDMI	1*HDMI (1080P)
VGA	1*VGA (1080P)
Alarm Input	N/A
Alarm Output	N/A
RS-485	N/A
HDD	1 SATA, up to 8TB capacity for each HDD

Power

Power supply	DC 12V2A
Consumption	Max. 10W without HDD


General

Working Temperature	0°C~+55°C
Working Humidity	10~90%
Dimensions	233mm*254mm*42mm
Net Weight	0.91KG
Gross Weight	1.41KG


Ordering Information

Type	Part Number	Description
H.265 DVR	Z8404XE-S	4 CH H.265 1080P Lite 1 SATA DVR

Dimensions (mm)

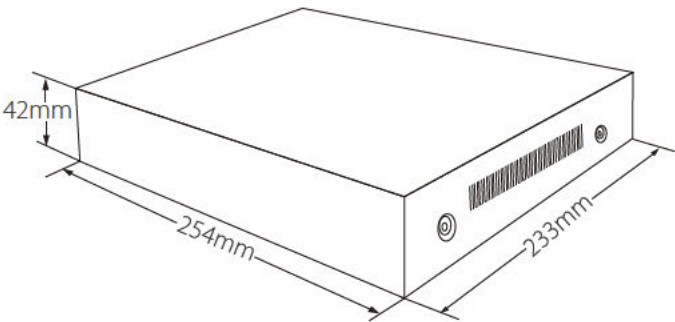

Rear Panel

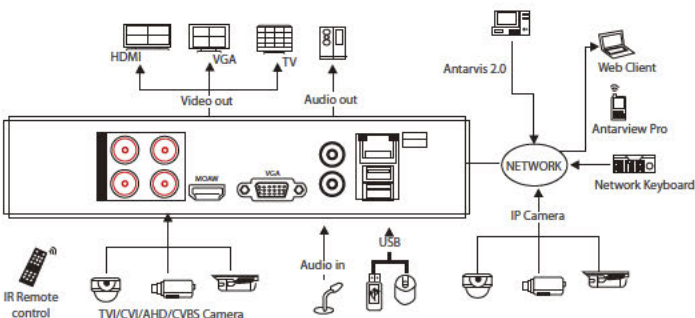

www.zkteco.technology

