

IN01-A

Fingerprint Time Attendance & Access Control Terminal



Introduction

IN01-A is a 3-inch TFT screen Attendance & Access Control Terminal. Adopting the new user-friendly firmware and latest core-board improves performance, accelerates identification speed and has more expansibility for various customization requirements. What's more, the user-friendly interface brings you a new experience. Built-in 2000mAh backup battery can eliminate the trouble of power failure. RS232/485, TCP/IP, USB-host and optional Wi-Fi, GPRS ensure a smooth data transmission between device and PC.

The IN01-A has access control interface for Wiegand-in, Wiegand-out, door lock, alarm and bell.

Features

Remarkable User Experience

- *Intuitive and stunning UI designed with the most popular and internationalized element.
- *Interface operation adopts modularized hierarchical design. Simpler, better and more logical.
- *Great user interactivity.

Enhanced Features and Performance

- *Multi-languages.
- *Data backup and retrieve.
- *Advanced User ID consisted of letters and numbers.
- *Chip encryption for firmware protection.
- *Faster matching speed: Less than 0.5 second.
- *Optional integrated Wi-Fi/GPRS.

Excellent Expandability

- *Easy to extend functions and customize customers' requirements.

Access Control Interface


- *For wiegand in and out, door lock connection, alarm and bell.




Specifications

Fingerprint Capacity	3000
ID Card Capacity	10,000 (Optional)
Record Capacity	100,000
Display	3-inch TFT Screen
Communication	TCP/IP, RS232/485, USB (host and client)
Standard Functions	Work code, SMS, DST, Self-Service Query, Automatic Status Switch, Built-in Battery, Multiple Verify Mode
Optional Functions	ID/Mifare/HID, GPRS, Wi-Fi, Webserver, Photo ID, ADMS, Scheduled-bell, Anti-passback, External Bell, External Printer
Access Control Interface	3rd Party Electric Lock, Door Sensor, Exit Button, Alarm, and Door Bell
Wiegand Signal	Input & Output
Software	ZKTime.Net, ZKTime5.0
Power Supply	DC 12V 3A
Verification Speed	≤0.5 Sec.
Operating Temp.	0°C - 45°C
Operating Humidity	20%-80%
Dimension	211.5*159.4*47.8mm (Length*Width*Thickness)


Dimensions

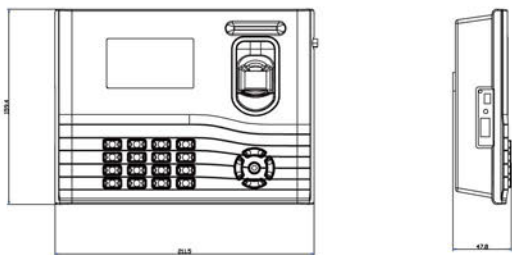


Interface

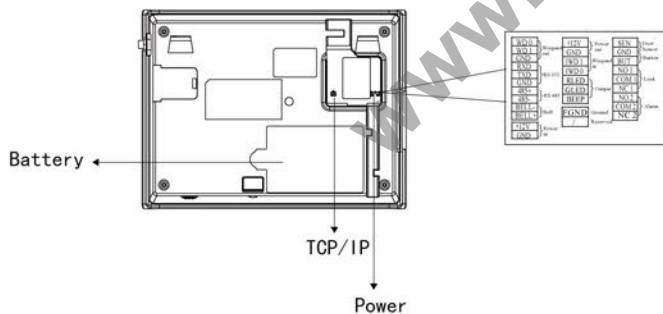

Configuration

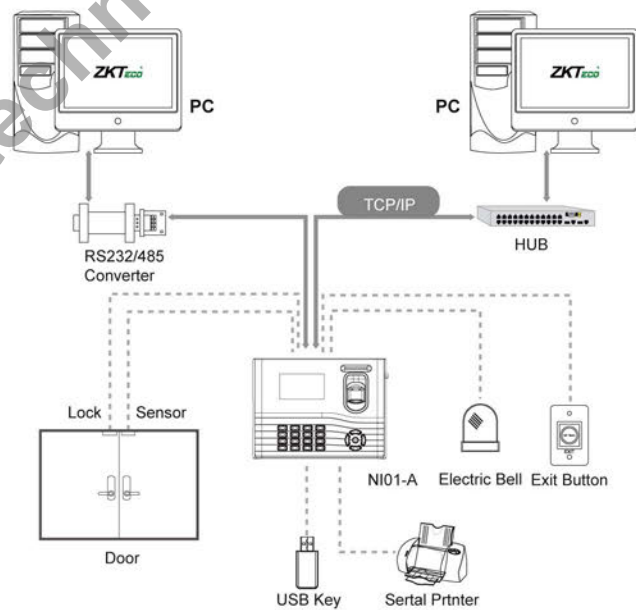

Package List

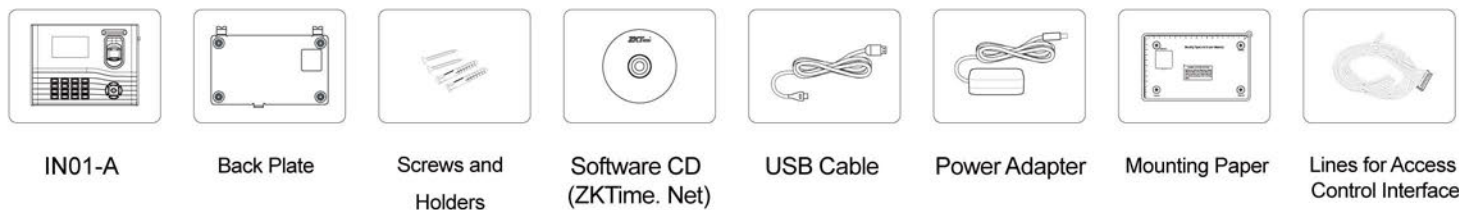

ZKTeco Inc.

ZK Mansion, Wuhe Rd, Gangtou, Bantian, Buji Town, Longgang District, Shenzhen China 518129
 Tel: 86-755-8960 2345/46/47/48
 Fax: 86-755-8960 2675
 www.zkteco.com

Global Offices:

USA: +1 732-412-6007
 EU: +34 916532891
 Brazil: +55 31 2515-8326
 Thailand: +66-027199154
 Mexico: +52-55-52928418

South Africa: +27 12 259 1047
 Egypt: +202-24055541
 Dubai: +971 4 6091 310
 India: +91 8123536788
 Indonesia: +62 21 2921 8949
 Vietnam: +84-0169-5813007

