

ProBio

Multi-Biometric Access Control Terminal



ProBio is the first access control terminal to apply the most advanced Silk ID and face technology together. Silk ID not only has outstandingly high identification rate towards dry, wet, and rough fingers, but also provides the utmost security with alive finger detection. It can operate under strong light, and activates automatically when finger approaches to save power.

Using ZKTeco's latest ZKFACE version 7.0 high-speed face recognition algorithm, it has extremely high verification speed and low error rate, in addition to being able to effectively prevent duplicated registration.

In addition, the new ZMM 220 hardware platform has a clock rate of 1.2 GHZ, greatly enhancing the speed of fingerprint and face verification. Such speedy hardware platform and fingerprint and face algorithm greatly enhance the speed of fingerprint and face verification.

Features



Revolutionary SilkID
Fingerprint Sensor



Simple Management &
Scalability



Multiple Verification Modes:
Face / Fingerprint /
Card / Password



Built In Camera
* Event Snapshot
* User Photo



Outstanding Performance With
Dry, Wet and Rough Fingers



Specifications (GL Exclusive Feature)

Capacity

Fingerprints	4,000
Faces	2,000 (1:N) / 4,000 (1:1)
Cards	10,000
Transactions	100,000
User Photos	4,000
Event Photos	2,000

Communication

- TCP/IP, RS485 (For Slave Reader)
- USB Host
- Wiegand Input / Output
- Security Relay Box

Access Control Interface

- Lock Relay Output
- Alarm Output / Auxiliary Input
- Exit Button / Door Sensor
- Doorbell Output

Hardware

- 1.2GHz High Speed CPU
- Memory 128MB RAM / 256MB Flash
- SilkID Fingerprint Sensor
- 2.8 Inches TFT-LCD Touch Screen
- 125KHz EM Reader / IC Card (Optional)
- Hi-Fi Voice & Indicator
- Tamper Switch Alarm
- Dual IR Camera

Standard Functions

- Access Levels / Groups / Holidays
- DST / Bell Schedule
- Duress Mode
- Anti-Passback
- Record Query
- Custom Wallpaper & Screen Saver

Special Functions

- Multiple Biometric Verification Modes
- Alive Finger Detection
- Event Snapshot
- User Photo
- ZK Encrypted Card (Optional)
- Fingerprint Card

Compatibility

- Wiegand Slave Reader
- RS485 FP Slave Reader
- ZKBioSecurity Software


Additional Info

- Working Temperature: -10 °C ~ 50 °C
- Dimensions: 190.8 × 85 × 103 mm
- ZKFace v7.0 & ZKFinger v10.0 Algorithms
- Fingerprint: FAR≤0.0001% FRR≤0.01%
- Face: FAR≤0.001% FRR≤1%
- Package Includes 12V 3A Power Supply


Power

- Operating Voltage 12V DC
- Current Draw < 500mA

Configuration

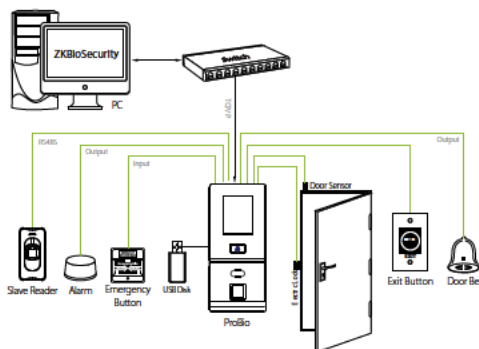

Dimensions (mm)

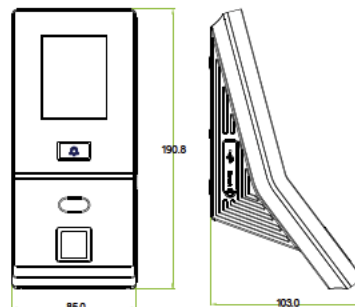

ZKTECO CO.,LTD.

E-mail: sales@zkteco .com



Copyright © 2020 ZKTECO CO., LTD. All rights reserved.

V1.0 2020.10.14