

# ProCapture-T

## Fingerprint Access Control Terminal








**ProCapture-T** is an access control terminal applying the most advanced SilkID fingerprint sensor. Its outstanding performance provides a high identification rate towards dry, wet and rough fingers, being capable to detect alive finger for a higher security level.

The fingerprint verification speed has been dramatically increased by its optimized fingerprint algorithm and the brand new ZMM220 hardware platform, equipped with a fast 1.2GHz processor.

The touch keypad delivers a smooth and easy user operation to enroll and delete users, set device and access control parameters, etc.

Its built-in camera allows to capture user's photos and events snapshots to provide attendance evidence (optional function).

# Features

-  Modern Design & Interactive UI
-  Revolutionary BioID Fingerprint Sensor
-  Multiple Verification Modes:  
Fingerprint / Card / Password
-  Outstanding Performance With Dry, Wet and Rough Fingers
-  Built In Camera  
\* Event Snapshot  
\* User Photo (Optional)



# Specifications (G): GL Exclusive Feature

**Capacity**

Fingerprint	6,000
Card	10,000
Transaction	100,000
User Photo	3,000
Event Photo	7,000

- Communication**
- (G) TCP/IP
  - RS485 (For Slave Reader)
  - (G) USB Host
  - Wiegand Input / Output
  - Security Relay Box

- Access Control Interface**
- Lock Relay Output
  - Alarm Output / Auxiliary Input
  - Exit Button / Door Sensor
  - Doorbell Output

- Hardware**
- (G) 1.2GHz High Speed CPU
  - (G) Memory 128MB RAM / 256MB Flash
  - SilkID Fingerprint Sensor
  - 2.4 Inches TFT-LCD Screen
  - 125KHz EM Reader / IC Card (Optional)
  - Hi-Fi Voice & Indicator
  - Tamper Switch Alarm
  - (G) Touch Keypad
  - 120° Wide Angle Camera

- (G) **Standard Functions**
- Access Levels / Groups / Holidays
  - DST / Bell Schedule
  - Duress Mode
  - Anti-Passback
  - Record Query
  - Custom Wallpaper & Screen Saver

- (G) **Special Functions**
- Multiple Verification Modes
  - Alive Finger Detection
  - Event Snapshot
  - (G) User Photo (Optional)
  - ZK Encrypted Card (Optional)
  - Fingerprint Card

- (G) **Compatibility**
- Wiegand Slave Reader
  - RS485 FP Slave Reader
  - ZKBioSecurity Software


**Additional Info**

Working Temperature: -10 °C ~ 50 °C  
 Dimensions: 195.5 × 87 × 35 mm.  
 Fingerprint Algorithm ZKFinger v1.0.0  
 Fingerprint: FAR≤0.0001% FRR≤0.01%  
 Package Includes 12V 3A Power Supply

**Power**

Operating Voltage 12V DC  
 Current Draw < 500mA

# Configuration

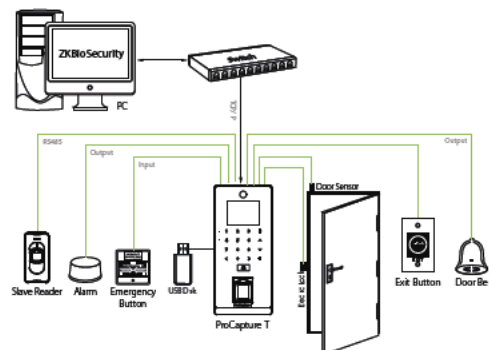

# Dimensions (mm)

